

# TEST REPORT

**Applicant:** Cubietech Co., Ltd.

**Address of Applicant:** 3/F, Private Enterprises Mansion, No.10, Technology 1st Road, Gangwan AV., Tangjia Bay Town, Zhuhai, Guangdong, China

**Equipment Under Test (EUT)**

Product Name: Cubieboard

Model No.: Cubieboard

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B:2012

**Date of sample receipt:** October. 26, 2013

**Date of Test:** Oct. 26-30, 2013

**Date of report issued:** Oct. 30, 2013

**Test Result :** Pass \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**

**Laboratory Manager**

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Version

Version No.	Date	Description
00	Oct. 30, 2013	Original

**Prepared By:**

*Sam. Gao*

**Project Engineer**

**Date:**

*October 30, 2013*

**Check By:**

*Hans. Hu*

**Reviewer**

**Date:**

*October 30, 2013*

## 3 Contents

1	COVER PAGE.....	1
2	VERSION.....	2
3	CONTENTS .....	3
4	TEST SUMMARY .....	4
5	GENERAL INFORMATION.....	5
5.1	CLIENT INFORMATION.....	5
5.2	GENERAL DESCRIPTION OF E.U.T.....	5
5.3	TEST MODE AND TEST VOLTAGE.....	5
5.4	DESCRIPTION OF SUPPORT UNITS.....	5
5.5	DEVIATION FROM STANDARDS.....	5
5.6	ABNORMALITIES FROM STANDARD CONDITIONS .....	5
5.7	TEST FACILITY .....	6
5.8	TEST LOCATION .....	6
6	TEST INSTRUMENTS LIST .....	7
7	TEST RESULTS AND MEASUREMENT DATA.....	8
7.1	RADIATED EMISSION .....	8
7.2	CONDUCTED EMISSIONS .....	13
8	TEST SETUP PHOTO .....	18
9	EUT CONSTRUCTIONAL DETAILS.....	19

## 4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	Pass
Radiated Emissions	Part15.109	Pass

*Pass: The EUT comply with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	Cubietech Co., Ltd.
Address of Applicant:	3/F,Private Enterprises Mansion,No.10,Technology 1 <sup>st</sup> Road, Gangwan AV. Tangjia Bay Town, Zhuhai, Guangdong, China
Manufacturer/ Factory:	Cubietech Co., Ltd.
Address of Manufacturer / Factory:	3/F,Private Enterprises Mansion,No.10,Technology 1 <sup>st</sup> Road, Gangwan AV. Tangjia Bay Town, Zhuhai, Guangdong, China

### 5.2 General Description of E.U.T.

Product Name:	Cubieboard
Model No.:	Cubieboard
Test model No.:	Cubieboard
Remark:	N/A
Trade Mark	Cubieboard
Power supply:	DC5V,2A( Power by AC/DC Adapter)

### 5.3 Test mode and Test voltage

<b>Test mode:</b>	
Normal mode	TF card playing 1kHz color bar
Normal mode	Removable disk playing 1kHz color bar
/	/
/	/
/	/
<b>Test voltage: AC:120V/60Hz for AC/DC adapter</b>	

### 5.4 Description of Support Units

Description	Manufacturer	Model	Serial Number
TV	AOC	TFT24660AG	T49A5JA000660B9

### 5.5 Deviation from Standards

None.
-------

### 5.6 Abnormalities from Standard Conditions

None.
-------

## 5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter

from the FCC is maintained in files. Registration 600491, July 20, 2010.

• **Industry Canada (IC) —Registration No.: 9079A-1**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by

Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

## 5.8 Test Location

Tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2013	Mar. 29 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2013	Jul. 02 2014
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 26 2013	Feb. 25 2014
5	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2013	Jul. 02 2014
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Coaxial cable	GTS	N/A	GTS210	Jul. 03 2013	Jul. 02 2014
8	Coaxial Cable	GTS	N/A	GTS211	Jul. 03 2013	Jul. 02 2014
9	Thermo meter	KTJ	TA328	GTS256	Jul. 03 2013	Jul. 02 2014

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS252	Sep. 08 2013	Sep. 07 2015
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 03 2013	Jul. 02 2014
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 03 2013	Jul. 02 2014
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 03 2013	Jul. 02 2014
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 03 2013	Jul. 02 2014
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 03 2013	Jul. 02 2014
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Thermo meter	KTJ	TA328	GTS233	Jul. 03 2013	Jul. 02 2014

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Barometer	ChangChun	DYM3	GTS257	Jul. 03 2013	Jul. 02 2014

## 7 Test results and Measurement Data

### 7.1 Radiated Emission


Test Requirement:	FCC Part15 B Section 15.109				
Test Method:	ANSI C63.4:2009				
Test Frequency Range:	30MHz to 1000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Limit:	Frequency	Limit (dB $\mu$ V/m @3m)		Value	
	30MHz-88MHz	40.00		Quasi-peak	
	88MHz-216MHz	43.50		Quasi-peak	
	216MHz-960MHz	46.00		Quasi-peak	
	960MHz-1GHz	54.00		Quasi-peak	
Test setup:	<p>The diagram illustrates the test setup. An EUT is placed on a turn table 0.8m above the ground. The turn table is 3m away from an antenna tower. The antenna tower has a search antenna at a height of 4m. The RF test receiver is connected to the search antenna. The ground plane is indicated at the bottom.</p>				
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak</li> </ol>				



	values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details, found the Full load mode which it is worst case mode, so only show the test data of the worst case mode.
Test results:	Pass

## Measurement Data


Test mode:	TF card playing 1kHz color bar	Antenna Polarity:	Horizontal
------------	--------------------------------	-------------------	------------

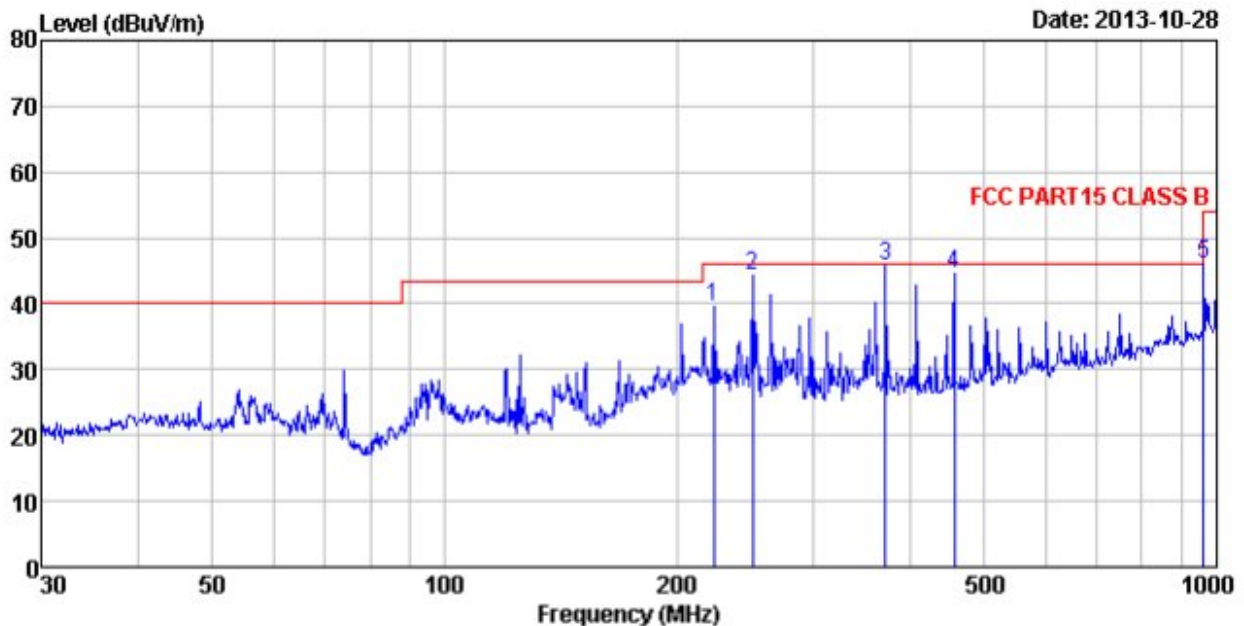

Test mode : IF playing mode  
 Power Rating : AC 120V/60Hz  
 Test Engineer: Bing

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	Loss	Factor	dB	dBuV/m	dBuV/m	dB
1	222.950	56.42	13.30	1.98	32.15	39.55	46.00	-6.45	Peak
2	250.301	60.34	14.07	2.12	32.16	44.37	46.00	-1.63	Peak
3	372.005	58.43	16.53	2.72	31.96	45.72	46.00	-0.28	Peak
4	457.507	55.71	17.59	3.12	31.70	44.72	46.00	-1.28	Peak
5	962.162	48.76	23.49	5.09	31.22	46.12	54.00	-7.88	Peak


Test mode:	TF card playing 1kHz color bar	Antenna Polarity:	Vertical
------------	--------------------------------	-------------------	----------

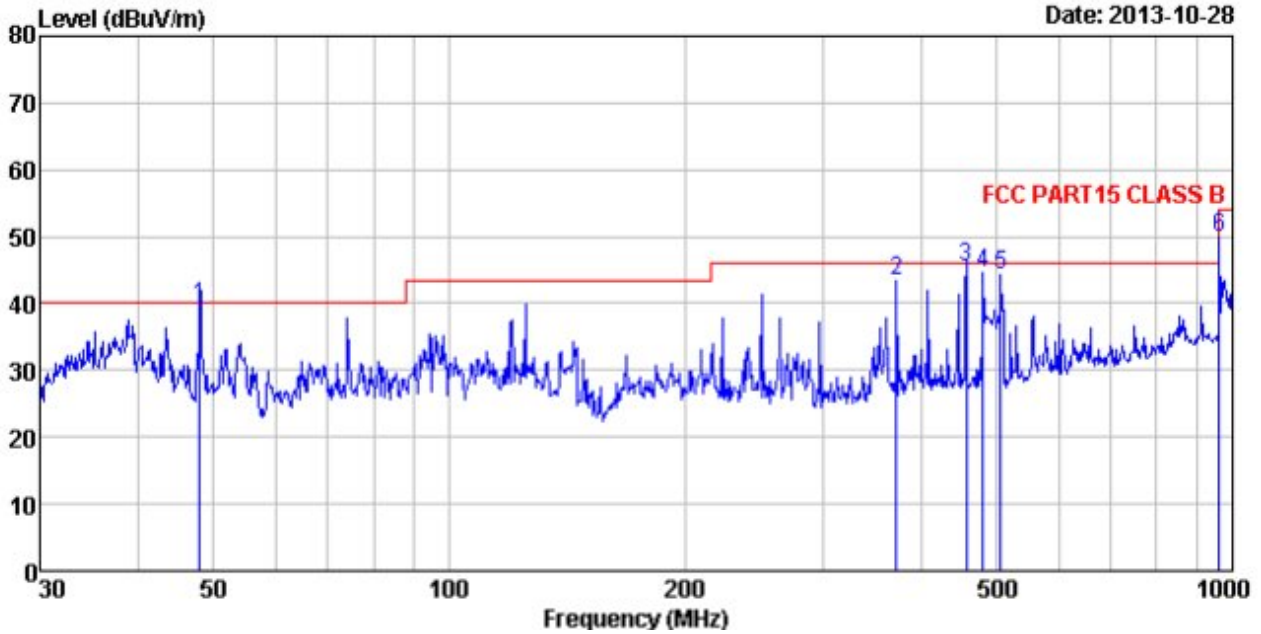

Test mode : TF playing mode  
 Power Rating : AC 120V/60Hz  
 Test Engineer: Bing

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	47.994	55.31	15.36	0.75	31.98	39.44	40.00	-0.56	Peak
2	372.005	56.09	16.53	2.72	31.96	43.38	46.00	-2.62	Peak
3	457.507	56.58	17.59	3.12	31.70	45.59	46.00	-0.41	Peak
4	480.528	54.96	18.07	3.22	31.62	44.63	46.00	-1.37	Peak
5	506.479	53.68	18.74	3.33	31.53	44.22	46.00	-1.78	Peak
6	962.162	52.41	23.49	5.09	31.22	49.77	54.00	-4.23	Peak


Test mode:	Removable disk playing 1kHz color bar	Antenna Polarity:	Horizontal
------------	---------------------------------------	-------------------	------------

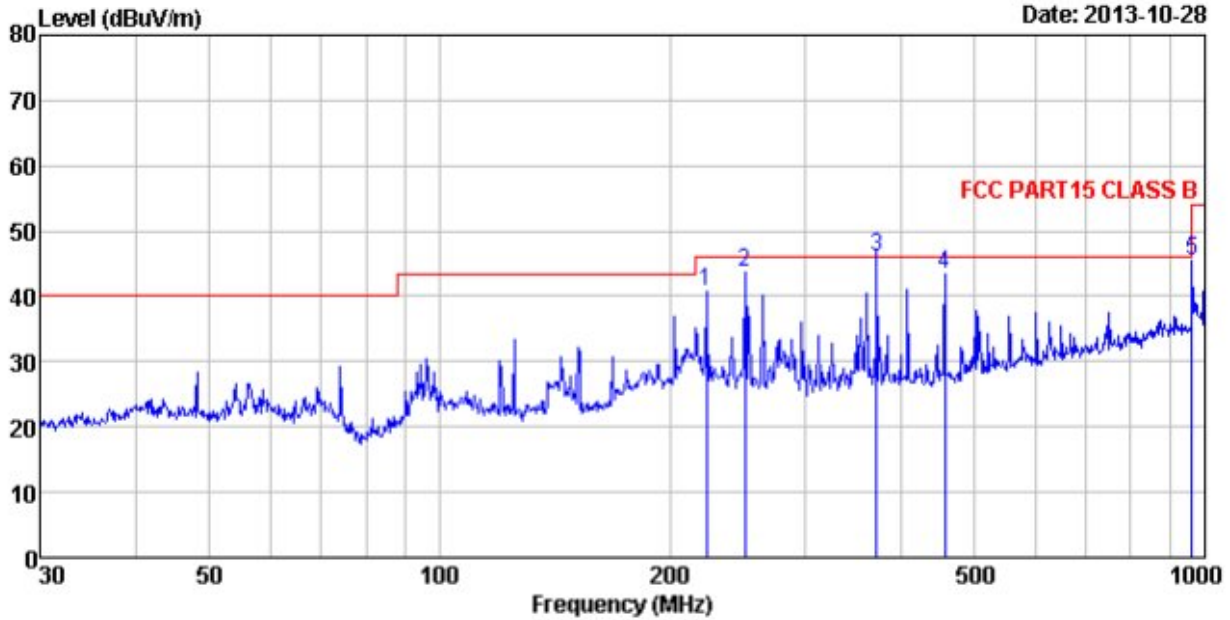

Test mode : USB mode  
 Power Rating : AC 120V/60Hz  
 Test Engineer: Bing

	Freq	ReadAntenna	Cable Preamp	Limit	Over	Remark			
	MHz	Level	Loss	Line	Limit				
		dBuV	Factor	dB	dB				
		dB/m	dB	dB	dBuV/m	dBuV/m			
1	222.950	57.68	13.30	1.98	32.15	40.81	46.00	-5.19	Peak
2	250.301	59.74	14.07	2.12	32.16	43.77	46.00	-2.23	Peak
3	372.005	58.66	16.53	2.72	31.96	45.95	46.00	-0.05	Peak
4	457.507	54.42	17.59	3.12	31.70	43.43	46.00	-2.57	Peak
5	962.162	47.99	23.49	5.09	31.22	45.35	54.00	-8.65	Peak

Test mode:	Removable disk playing 1kHz color bar	Antenna Polarity:	Vertical
------------	---------------------------------------	-------------------	----------

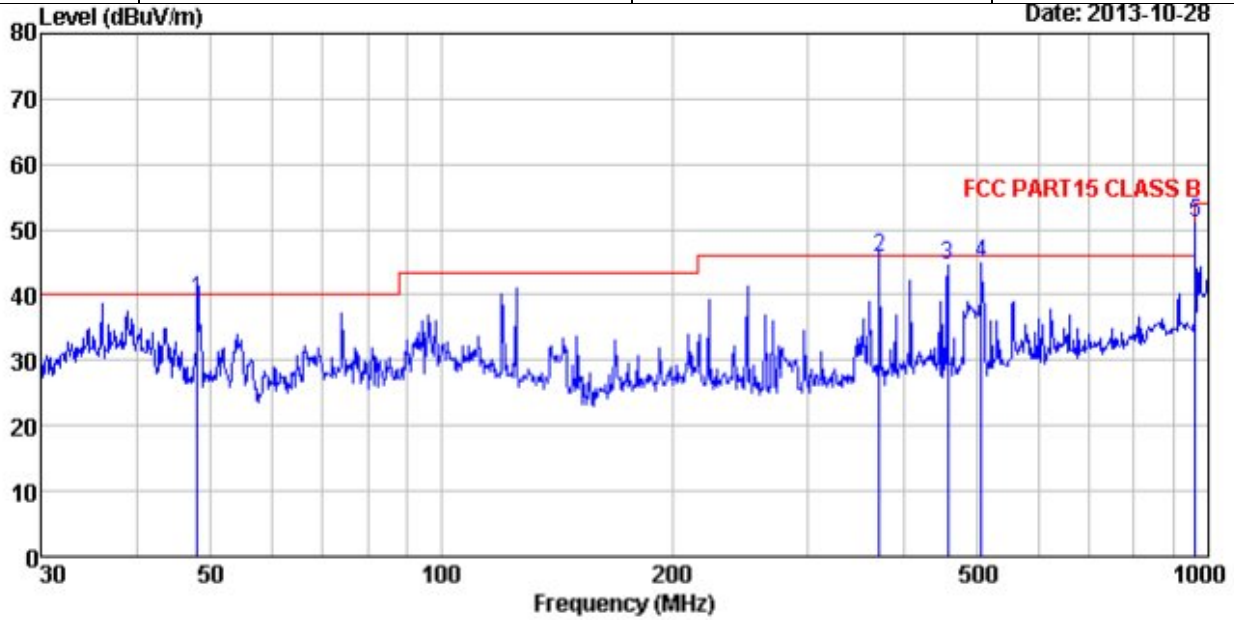

Test mode : USB mode  
 Power Rating : AC 120V/60Hz  
 Test Engineer: Bing

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
-----	-----	-----	-----	-----	-----	-----	-----	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	47.994	55.16	15.36	0.75	31.98	39.29	40.00	-0.71 Peak
2	372.005	58.59	16.53	2.72	31.96	45.88	46.00	-0.12 Peak
3	457.507	55.70	17.59	3.12	31.70	44.71	46.00	-1.29 Peak
4	506.479	54.31	18.74	3.33	31.53	44.85	46.00	-1.15 Peak
5	962.162	53.63	23.49	5.09	31.22	50.99	54.00	-3.01 Peak

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107														
Test Method:	ANSI C63.4:2009														
Test Frequency Range:	150kHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9kHz, VBW=30kHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>0.5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	0.5-30	60	50
Frequency range (MHz)	Limit (dB $\mu$ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
0.5-30	60	50													
Test setup:	<p><i>Remark</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>														
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement.</li> </ol>														
Test environment:	Temp.: 25 °C ; Humid.: 52% ; Press.: 1 012mbar														
Test Instruments:	Refer to section 6 for details														
Test mode:	Refer to section 5.3 for details, found the Full load mode which it is worst case mode, so only show the test data of the worst case mode.														
Test results:	Pass														


### Measurement Data

Test mode:	TF card playing 1kHz color bar	Phase Polarity:	Line
------------	--------------------------------	-----------------	------

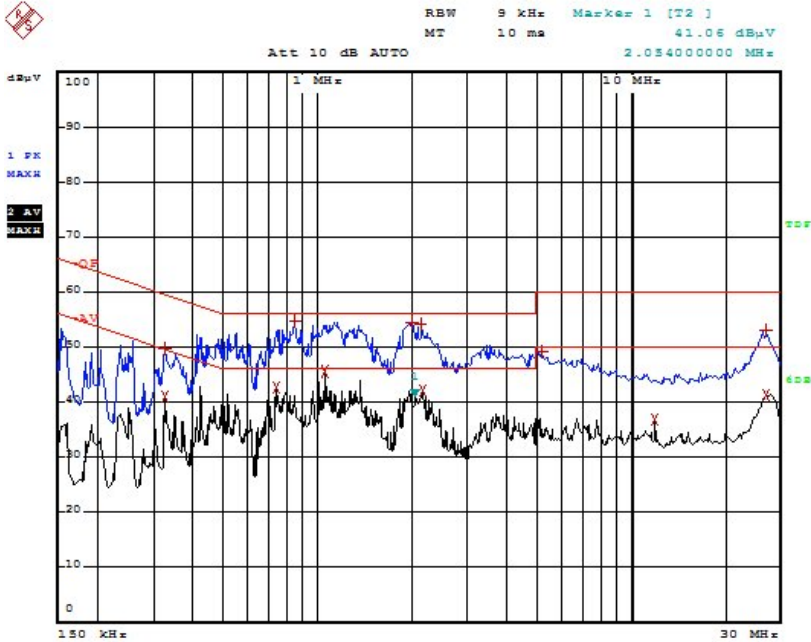


EDIT PEAK LIST (Prescan Results)			
TRACE	FREQUENCY	LEVEL dBuV	DELTA LIMIT dB
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
1 Max Peak	326 kHz	49.64	-9.91
2 Average	326 kHz	40.97	-8.38
2 Average	742 kHz	42.67	-3.32
1 Max Peak	846 kHz	54.61	-1.38
2 Average	1.062 MHz	45.65	-0.34
1 Max Peak	2.006 MHz	54.59	-1.40
1 Max Peak	2.13 MHz	54.15	-1.84
2 Average	2.158 MHz	42.06	-3.93
1 Max Peak	5.198 MHz	49.21	-10.78
2 Average	11.99 MHz	36.97	-13.02
1 Max Peak	26.958 MHz	53.10	-6.89
2 Average	26.958 MHz	41.36	-8.63

Test mode:	TF card playing 1kHz color bar	Phase Polarity:	Neutral
------------	--------------------------------	-----------------	---------

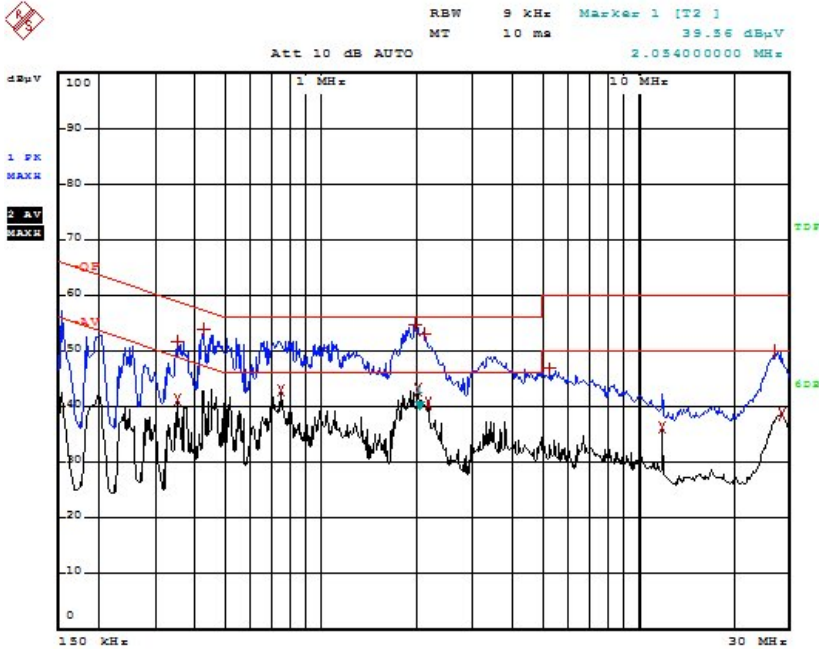

EDIT PEAK LIST (Prescan Results)			
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
1 Max Peak	350 kHz	51.87	-7.08
2 Average	350 kHz	41.29	-7.66
1 Max Peak	422 kHz	53.94	-3.46
2 Average	746 kHz	43.03	-2.96
1 Max Peak	1.982 MHz	54.61	-1.38
2 Average	2.034 MHz	43.08	-2.91
1 Max Peak	2.122 MHz	53.15	-2.84
2 Average	2.194 MHz	40.49	-5.30
1 Max Peak	5.278 MHz	46.93	-13.06
2 Average	11.99 MHz	36.46	-13.53
1 Max Peak	27.094 MHz	49.99	-10.00
2 Average	28.434 MHz	38.79	-11.20


Test mode:	Removable disk playing 1kHz color bar	Phase Polarity:	Line
------------	---------------------------------------	-----------------	------

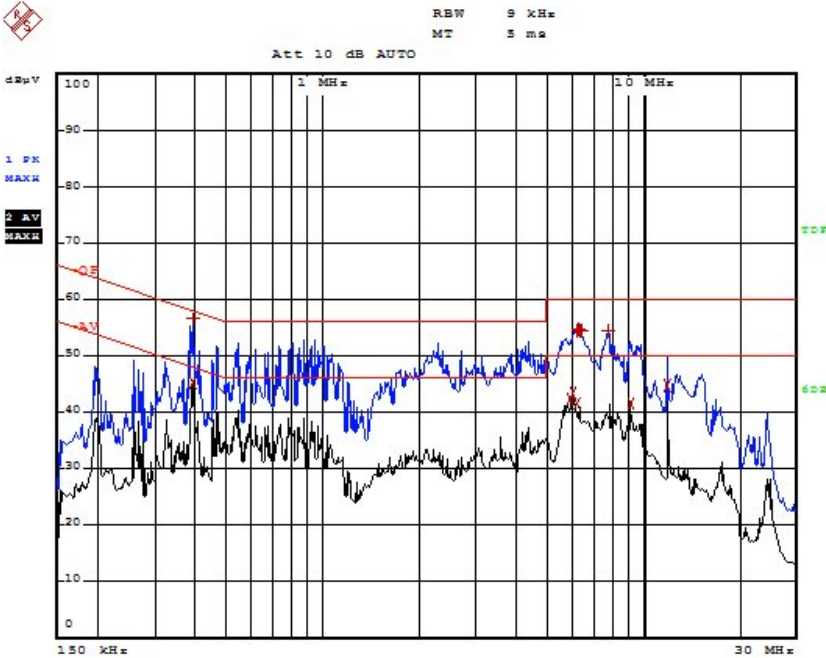

EDIT PEAK LIST (Prescan Results)				
TRACE1:		-QP		
TRACE2:		-AV		
TRACE3:		---		
TRACE		FREQUENCY	LEVEL dBuV	DELTA LIMIT dB
1	Max Peak	394 kHz	56.66	-1.31
2	Average	394 kHz	45.32	-2.65
2	Average	5.918 MHz	42.51	-7.48
2	Average	6.05 MHz	43.44	-6.55
2	Average	6.226 MHz	41.53	-8.46
1	Max Peak	6.254 MHz	54.34	-5.55
1	Max Peak	6.298 MHz	54.74	-5.25
1	Max Peak	6.358 MHz	54.51	-5.48
1	Max Peak	6.43 MHz	54.39	-5.60
1	Max Peak	7.806 MHz	54.40	-5.59
2	Average	9.138 MHz	41.54	-8.45
2	Average	11.986 MHz	44.85	-5.14



Test mode:	Removable disk playing 1kHz color bar	Phase Polarity:	Neutral
------------	---------------------------------------	-----------------	---------

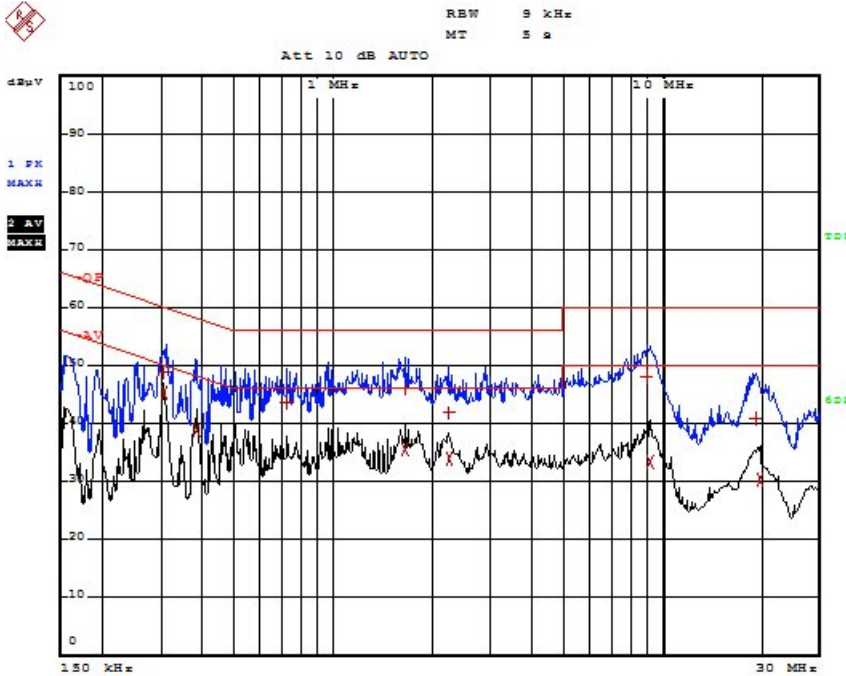


EDIT PEAK LIST (Final Measurement Results)			
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
2 Average	306 kHz	45.17	-4.90
1 Quasi Peak	310 kHz	48.99	-10.97
2 Average	386 kHz	39.07	-9.07
1 Quasi Peak	722 kHz	43.79	-12.20
1 Quasi Peak	1.65 MHz	46.13	-9.86
2 Average	1.65 MHz	35.47	-10.52
1 Quasi Peak	2.266 MHz	41.91	-14.09
2 Average	2.266 MHz	33.94	-12.05
1 Quasi Peak	8.958 MHz	48.12	-11.87
2 Average	9.266 MHz	33.47	-16.52
1 Quasi Peak	19.178 MHz	40.92	-19.07
2 Average	19.85 MHz	30.27	-19.73

**Notes:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## 8 Test Setup Photo



Radiated Emission


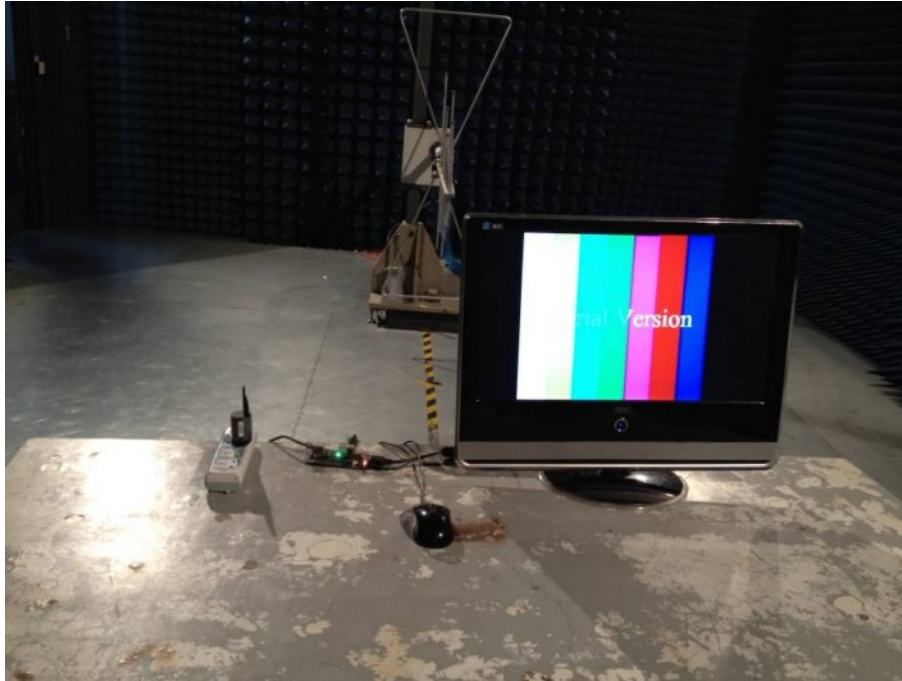



Conducted Emission



## 9 EUT Constructional Details

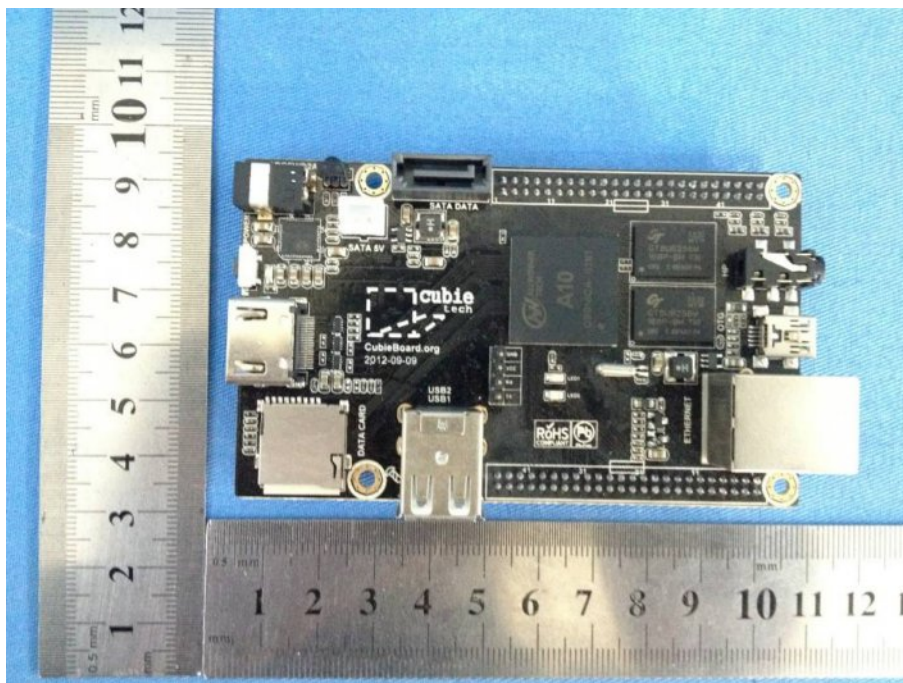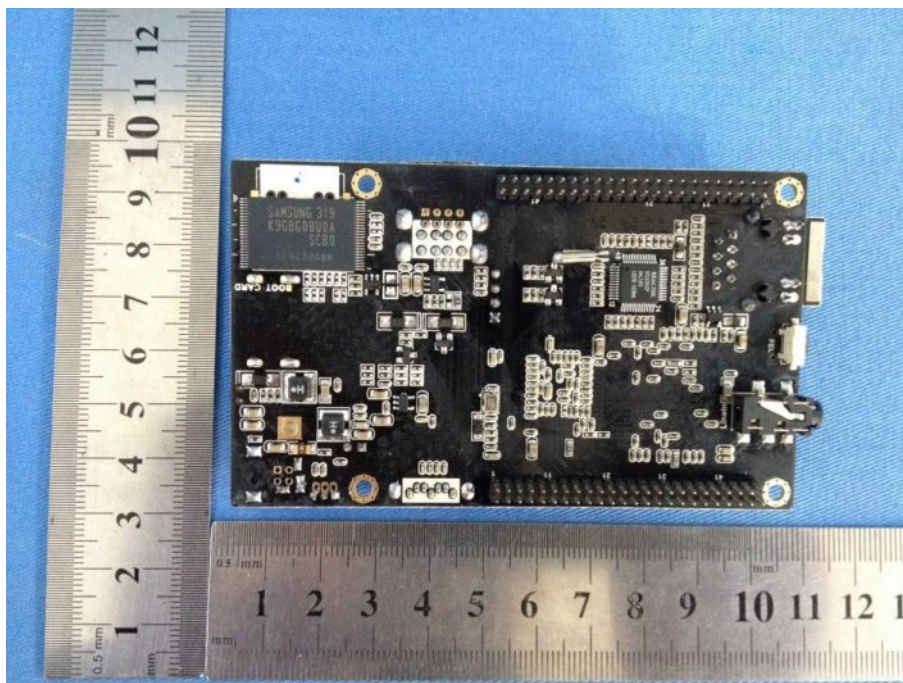

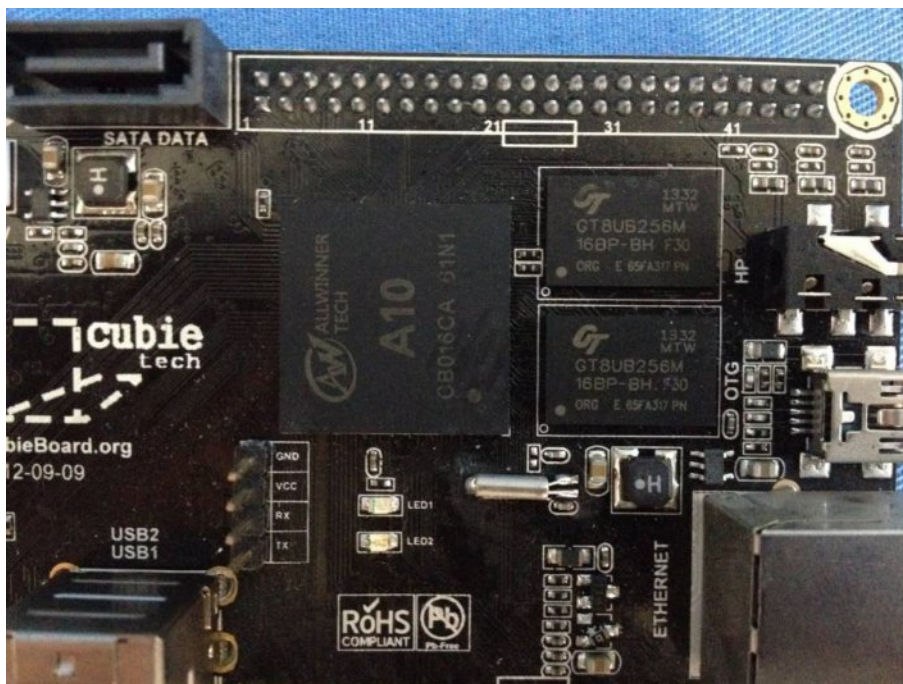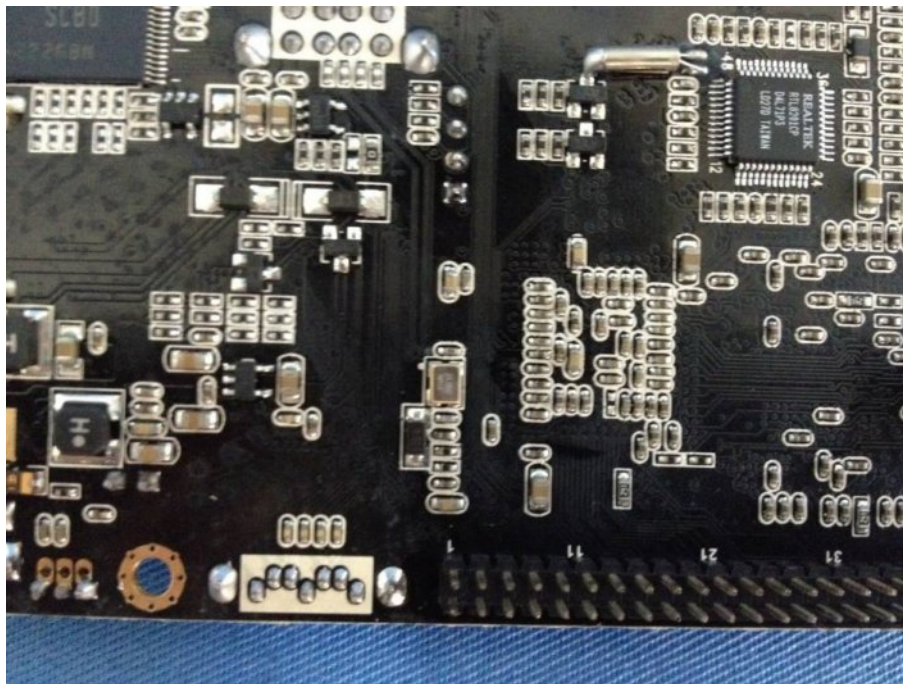

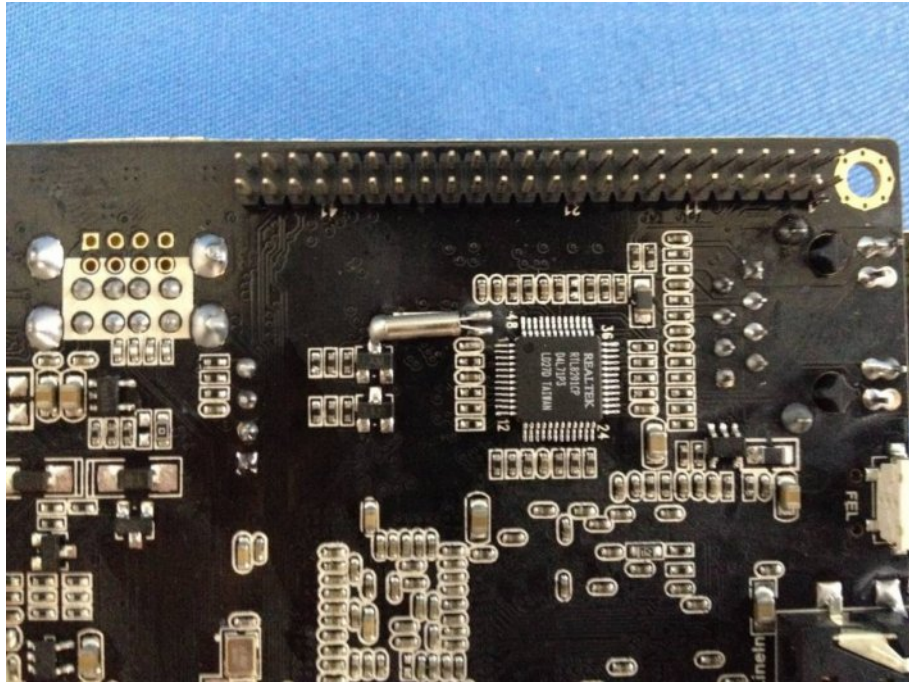



-----End -----